Ideal for handling quarter/ half pallets and special pallets

Width over forks manually adjustable (140–585 mm)

Particularly quiet running

Robust and durable

Fast lift as standard



AM V05

Hand pallet truck for display pallets (500 kg)


The AM V05 is the perfect solution for picking up quarter and half pallets as well as full Euro pallets. It is really useful where display pallets are frequently moved e.g.

on the shop floor. Small special sized pallets can also be transported due to the adjustable forks from 140 to 585 mm, with the advantages of ease of opera-

tion, robustness and reliability similar to the standard Jungheinrich hand pallet truck.



AM V05

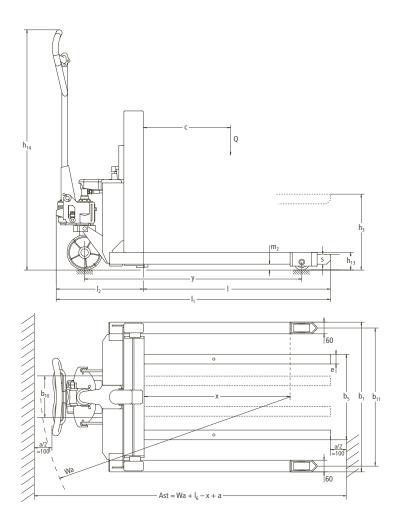



Technical Data in line with VDI 2198 as at: 10/2009

	1.1	Manufacturer (abbreviation)		Jungheinrich	1.1
1	1.2	Manufacturer's type designation		AM V05	1.2
	1.3	Drive		manual	1.3
Identification	1.4	Operator type		hand	1.4
fica	1.5	Load capacity/rated load	Q (t)	0.5	1.5
nti	1.6	Load centre distance	c (mm)	400	1.6
lde			2 ()		
	1.8	Load distance, centre of drive axle to fork	x (mm)	820	1.8
	1.9	Wheelbase	y (mm)	1120	1.9
ıts	2.1	Service weight	kg	155	2.1
Weights	2.2	Axle loading, laden front/rear	kg	320/325	2.2
M	2.3	Axle loading, unladen front/rear	kg	101/54	2.3
	3.1	Tyres		solid rubber, nylon	3.1
sis	3.2	Tyre size, front		180 x 50	3.2
Wheels, Chassis	3.3	Tyre size, rear		82×40	3.3
s, C	3.4	Additional wheels (dimensions)		-	3.4
leel	3.5	Wheels, number front rear (x = driven wheels)		1/1	3.5
Š	3.6	Tread, front	b ₁₀ (mm)	122	3.6
	3.7	Tread, rear	b ₁₁ (mm)	700	3.7
	4.4	Lift	h ₃ (mm)	390	4.4
	4.9	Height of tiller in drive position min./max.	h ₁₄ (mm)	1210	4.9
	4.15	Height, lowered	h ₁₃ (mm)	85	4.15
SL	4.19	Overall length	I ₁ (mm)	1405	4.19
sioi	4.19	Length to face of forks	l ₂ (mm)	450	4.19
nen	4.21	Overall width	b ₁ /b ₂ (mm)	760/-	4.20
Dir	4.22	Fork dimensions	s/e/l (mm)	50/50/955	4.22
Basic Dimensions	7.22	TOTA difficultions	37 671 (11111)	30/30/333	7.22
8	4.25	Distance between fork-arms	b₅ (mm)	140–585	4.25
	4.26	Distance between wheel arms/loading surfaces	b ₄ (mm)	640	
			4		
	4.32	Ground clearance, centre of wheelbase	m ₂ (mm)	30	4.32
	4.33	Aisle width for pallets 1000 x 1200 crossways	Ast (mm)	1805	4.33
	4.34	Aisle width for pallets 800 x 1200 lengthways	Ast (mm)	2005	4.34
	4.35	Turning radius	Wa (mm)	1425	4.35
ata	5.3	Lowering speed, laden/unladen	m/s	0.09/0.05	5.3
Performance Data					
fon					
Pe					

Make use of the advantages



Handling a quarter pallet



Handling a standard Euro pallet



A half pallet is picked up from a standard Euro pallet

Flexible usage

Loading and unloading small pallets from a standard Euro pallet cannot be undertaken with a standard hand pallet truck. The AM V05 provides the solution. Due to individually adjustable forks from 140 to 585 mm, a variety of loads can also be picked up and transported. It can also, of course, pick up standard Euro pallets.

Easy to handle

The smooth operating handle is equally suitable for left and right handed operators. Loads can be lowered smoothly with the special lowering valve.



Ergonomic handle

Jungheinrich UK Ltd.

Head Office:

Sherbourne House · Sherbourne Drive Tilbrook · Milton Keynes MK7 8HX

Phone 01908 363100 Fax 01908 363180

info@jungheinrich.co.uk www.jungheinrich.co.uk







Jungheinrich trucks conform to the European Safety Requirements.





